

AS24208

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS24208, REVISION E AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS24208, REVISION E. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

ISSUED 2004-04

CUSTODIAN: SAE AE-8/AE-8A

SAE Aerospace
*An SAE International Group***AEROSPACE STANDARD**

CABLE AND PLUG ASSEMBLY,
EXTERNAL POWER 115/200 VOLTS
3 PHASE, SINGLE POINT REFUELING

AS24208
SHEET 1 OF 2

Copyright 2004 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.


TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)
Email: custsvc@sae.org


SAE WEB ADDRESS: <http://www.sae.org>

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-7974.

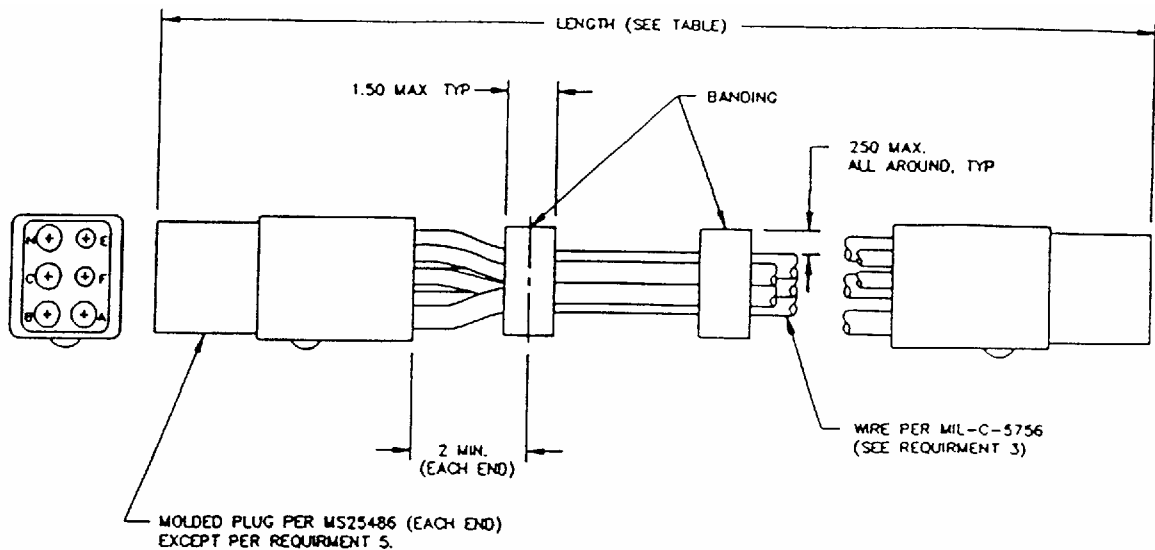

MS PART NO.	LENGTH IN FEET ±6 INCHES	A.S.N. C. WIRE SIZE
MS24208-1	60	4 AWG

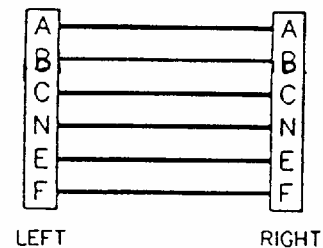

WIRING DIAGRAM

REQUIREMENTS:

1. MATERIAL: SEE PROCUREMENT SPECIFICATION
2. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED. TOLERANCES: DECIMALS $\pm .025$
3. ASSEMBLY CONSISTS OF FOUR 4 AWG SINGLE CONDUCTOR CABLES AND ONE 12 AWG TWO CONDUCTOR CABLE PER MIL-C-5756/2 AND /4 RESPECTIVELY.
4. PERMANENTLY MARKED "FOR SINGLE POINT REFUELING ONLY" BOTH SIDES ON EACH END BY STAMPED OR MOLDED LETTERS.
5. EACH PLUG SHALL HAVE A RED COLORED SURFACE OR A RED IDENTIFICATION PLUG INSERT.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.